

# MediaLink® Controllers for European Junction Boxes

MLC 52 RS EU  
MLC 52 RS VC EU

Simply take control of  
your A/V system

- Universal display control
- Discrete ON and OFF display power controls
- Volume control using buttons or integrated volume control knob
- Configurable, backlit, easy-to-label buttons
- Three easy ways to configure: IR learning, preconfigured display drivers, and IR beaming
- Inactivity timer for display shutoff
- Front panel security lockout
- Designed to mount in a standard two-gang European junction box
- Available with RAL9010 white or brushed aluminum faceplate



## Extron® Electronics

[www.extron.com](http://www.extron.com)

# Introduction

Extron **MLC 52 RS EU** and **MLC 52 RS VC EU** MediaLink Controllers are economical control panels ideally suited for conference room or classroom A/V systems. Each model fits in a standard two-gang European junction box and offers IR control and unidirectional RS-232 control. The MLC 52 RS VC EU adds an integrated volume control knob for use with any Extron power amplifier or preamplifier with a remote volume control port. By providing easy input selection, power, and volume control, these controllers make classroom A/V operations simple. Both models are available in a RAL9010 white or brushed aluminum finish to complement a wide range of environments.

## Consistent A/V Control in Every Room

Each MLC 52 controller acts as an extended remote control panel, providing user-friendly control for a display's power, volume, and input selection. Because the MLC 52 offers a central point of control for a display device's key functions, it eliminates the need for the display's handheld IR remote control, making operations much more efficient. With the MLC 52, there are no misplaced remotes to search for, no confusing menus to navigate through, and no dead batteries to replace.

No matter what brand of display is installed in each presentation venue, MLC 52 MediaLink Controllers always provide a consistent control method from room to room. Presenters with little or no training can walk into any MediaLink equipped classroom and operate the A/V system with ease.

## Configurable Buttons for Flexible Control Options

The MLC 52 MediaLink Controllers are easy to configure and no programming is required to make them work. Each MLC 52 features six buttons that can be configured to control almost any function of the projector, such as selecting an input, controlling the volume, muting the picture, or switching it on and off. Using the intuitive setup software provided, these buttons can be configured to send out any IR or RS-232 command supported by the projector, making it easy to customize the controller to meet the needs of single-display A/V systems.

Each button can store up to four separate commands, providing additional flexibility to meet the specific control requirements for most display devices. When a button is configured for Macro mode, all of the stored commands associated with that button can be sent with the press of a single button. In Toggle mode, the button steps through a series of two, three, or four commands, issuing a single command with each press of the button.

## Free Projector Drivers

Extron creates and administers a wide selection of commonly used projector control drivers. These IR and serial RS-232 drivers allow MediaLink Controllers to communicate with a display device. They enable control of basic projector functions such as power, input selection, and volume adjustment. Go to the Extron Web site at [www.extron.com](http://www.extron.com) to download drivers for the latest and most popular projectors.


## Three Easy Ways to Configure

The MLC 52 enables integrators to choose any of three methods when configuring the controllers. When used with the supplied Windows®-based configuration software, installation files can be saved and used to duplicate additional MLC 52 controllers. The files can also be archived for later use.

- **Simple configuration wizard** - Experience fast and simple setup within minutes using the front panel configuration port, supplied software, and the PC's RS-232 port. Quickly allocate a function to a button just by dragging the command to the desired button.
- **IR learning** - Set up the MLC 52 directly by beaming commands from the IR remote to the MLC 52, without the need for software and a PC.
- **IR beaming** - Setting up multiple controllers with the same configuration is made easy with IR beaming. Simply beam the complete configuration from one MLC 52 controller to another controller, without using any cable or software.

## Convenient EU Size

The MLC 52 RS EU Series controllers were designed to fit the standard two-gang (MLC 52 RS EU) or 2-gang (MLC 52 RS VC EU) European junction box.

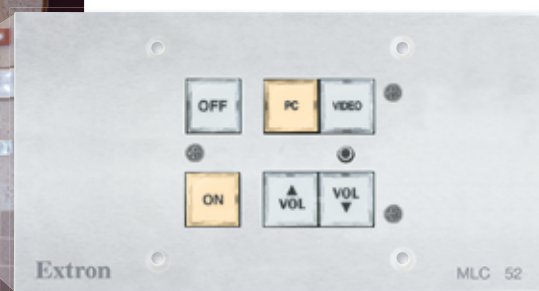

MLC 52 RS EU  
MediaLink Controller

# Overview

## Display ON/OFF

Clearly labeled buttons make it easy and convenient to turn the display on and off, eliminating the need for an external display remote

## Backlit Buttons

Illuminated buttons can be custom-labeled with supplied label insert sheets for easy identification. These buttons are helpful for presenters in low-light environments

## Multiple Memories

Each button can store up to four IR or serial RS-232 commands

## Configuration Port


Allows for configuration of the MLC 52 via the front panel

## Volume Control

Provides level control of a display's speaker or variable line level output. If control is not required or additional source switching is needed, these buttons can be configured for input selection, display mute, auto-image, or other commands

## European Mounting

MLC 52 RS EU Series controllers fit conveniently in a standard two-gang European junction box

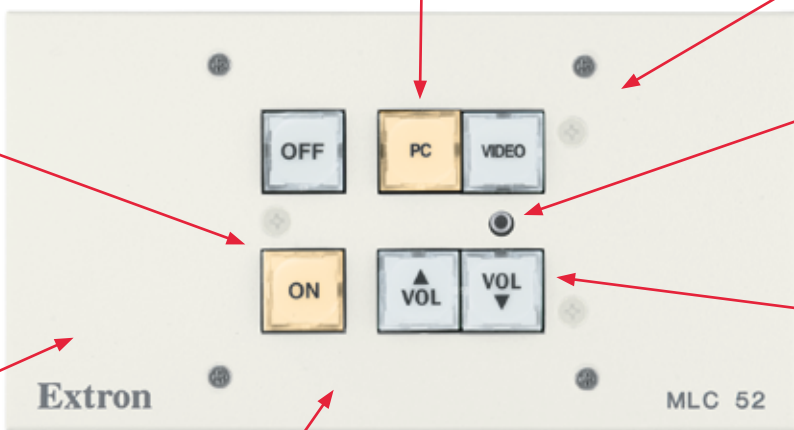


MLC 52 RS EU Front Panel

## RAL9010 White or Brushed Aluminum

Available in RAL9010 white or brushed aluminum finish to complement a wide range of environments

## Volume Control Knob

The MLC 52 RS VC EU features an integrated volume control knob for use with any Extron power amplifier or preamplifier with a remote volume control port

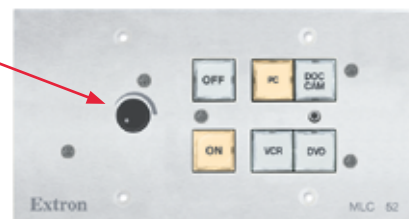


MLC 52 RS VC EU in brushed aluminum finish

## IR Learning Indicators

LEDs that provide visual feedback of memory block status and learning mode

## Inactivity Timer for Display Shut-off

Adjustable timer controls automatic shutdown to conserve energy, prevent plasma burn-in, or extend projector lamp life

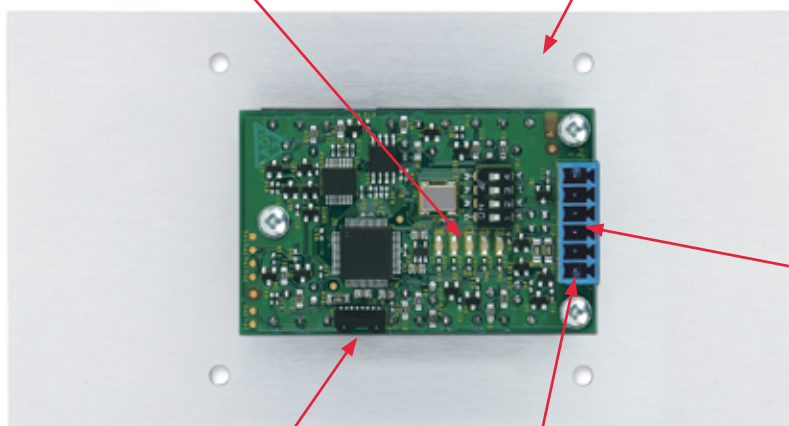

MLC 52 RS EU Back Panel

## IR Remote Control Input Port

Hardwired IR input for control with optional handheld remote and signal repeater

## Built-In IR Emitter/Receiver


Enables IR learning of commands from the display's handheld remote. Also provides IR beaming for controller-to-controller configuration without software

## Display Control Port

Provides serial RS-232 and IR universal display control



# Application Diagram and Specifications

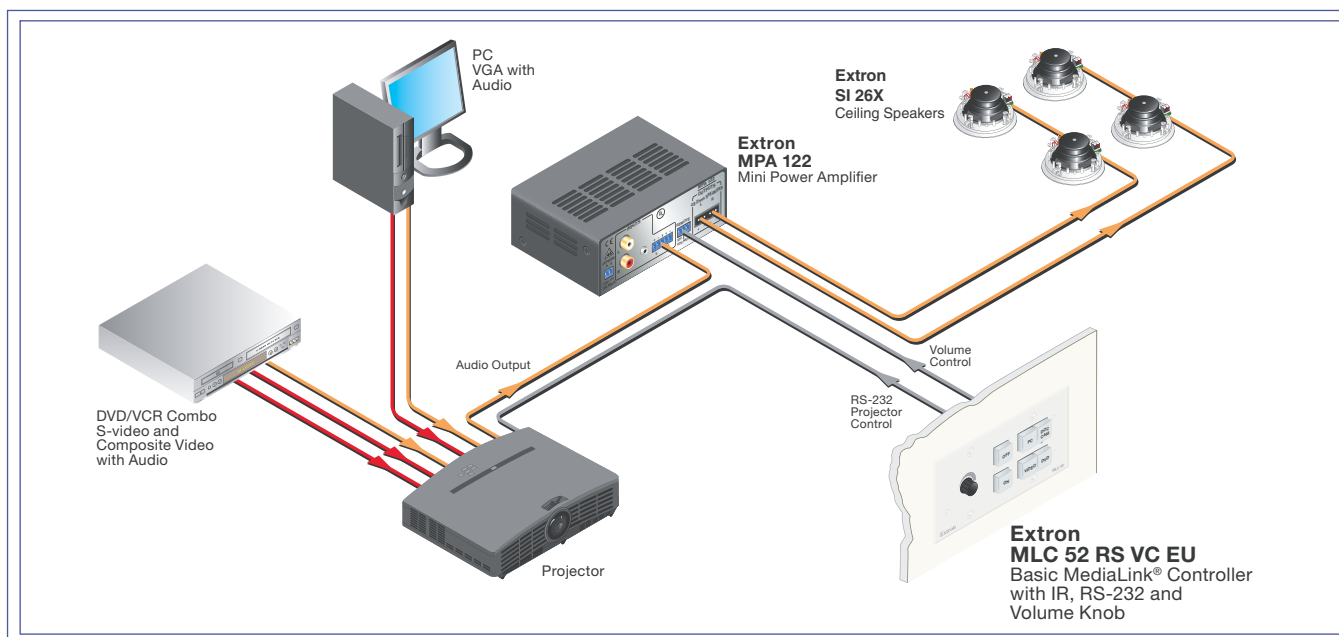

## CONTROL — HOST PORTS

Serial control port.....	1 bidirectional RS-232 front panel 2.5 mm mini stereo jack
Baud rate and protocol .....	9600 baud, 8 data bits, 1 stop bit, no parity
Serial control pin configurations .....	Mini stereo jack: tip = TX, ring = RX, sleeve = GND
Program control .....	Extron's configuration program for Windows®
	Extron's Simple Instruction Set (SIS™)
IR learning frequencies .....	30 kHz to 62 kHz
IR learning distance .....	4" (10 cm) to 14" (36 cm) from the front panel

## CONTROL — SERIAL PORT

Display control port .....	(1) 3.5 mm captive screw connector, 6 pole for unidirectional RS-232 control (±5 V) (connector is shared with IR control port and power input)
Baud rate and protocol (RS-232) .....	57600 to 1200 baud (9600 default); 8 (default) or 7 data bits; 1 stop bit; no parity (default), or even or odd parity

## CONTROL — IR PORT

IR control port .....	(1) 3.5 mm captive screw connector, 6 pole for IR (connector is shared with serial control and power input); TTL level (0 to 5 V) modulated infrared control from 30 kHz up to 60 kHz
-----------------------	---

## CONTROL — REMOTE VOLUME (VC MODELS ONLY)

Volume control port .....	(1) 3.5 mm direct insertion captive screw connector, 3 pole
Pin configuration .....	1 = +10 VDC, 50 mA (max); 2 = volume (variable voltage); 3 = GND
Volume control voltage range .....	0 V (mute) to 10 V (maximum volume)

## GENERAL

External power supply.....	100 VAC to 240 VAC, 50/60 Hz, external; to 12 VDC, 2 A, regulated
Power input requirements .....	12 VDC, 0.15 A
Mounting	
MLC 52 RS EU, MLC 52 RS VC EU .....	Mountable into standard 50 mm deep European junction boxes
Enclosure type .....	Metal
Enclosure dimensions	
MLC 52 RS EU	
Faceplate .....	3.2" H x 6.0" W x 0.1" D (2-gang EU) (8.1 cm H x 15.2 cm W x 0.3 cm D)
Device .....	1.7" H x 2.7" W x 1.4" D (4.3 cm H x 6.8 cm W x 3.5 cm D) (Overall rear dimensions, including connectors. Allow at least 1.85" [4.7 cm] depth in the junction box for device and cable clearance.)

## GENERAL (CONT.)

MLC 52 RS VC EU	
Faceplate .....	3.2" H x 6.0" W x 0.1" D (2-gang EU) (8.1 cm H x 15.2 cm W x 0.3 cm D)
Device .....	1.7" H x 4.5" W x 1.4" D (6.8 cm H x 11.4 cm W x 3.5 cm D) (Overall rear dimensions, including connectors. Allow at least 1.85" [4.7 cm] depth in the junction box for device and cable clearance.)
Product weight .....	0.3 lb (0.1 kg)
Shipping weight .....	3 lbs (2 kg)
Vibration .....	ISTA 1A in carton (International Safe Transit Association)
Regulatory compliance	
Safety .....	CE, CUL, UL
EMI/EMC .....	CE, C-tick, FCC Class A, ICES, Section 508 of the Rehabilitation Act (29U.S.C.794d), VCCI Class A
MTBF .....	30,000 hours
Warranty .....	3 years parts and labor

**NOTE:** All nominal levels are at ±10%

Model	Version Description	Part Number
Two-Gang		
MLC 52 RS EU	Brushed Aluminum Faceplate .....	60-744-34
MLC 52 RS EU	RAL9010 White Faceplate .....	60-744-35

Two-Gang with Integrated Volume Control Knob		
MLC 52 RS VC EU	Brushed Aluminum Faceplate .....	60-745-34
MLC 52 RS VC EU	RAL9010 White Faceplate .....	60-745-35

### Optional Accessories

CFG Cable	9 DB Female-2.5 mm TRS Config Cable - RS Version Only .....	70-335-01
IPL T S2	Two Serial Port IP Link Ethernet Control Interface .....	60-544-01
IR Link	Wall-Mountable IR Signal Repeater .....	60-404-02
IR Sensor	Remote IR Receiver .....	70-223-01

### Included Accessories

EPS 1210B	100-240VAC, 50/60Hz, to 12VDC, 2A, wire .....	70-055-01
MLC 52 Series		
Button Labels	Text and Icon Labels .....	33-1262-01
International Labels	MediaLink International Faceplate Labels .....	33-1167-0X
IR Emitter and Shield Kit	IR Emitter Kits .....	70-283-01

Specifications are subject to change without notice.



### Extron EMEA

+800.3987.6673  
Inside Europe Only  
  
+31.33.453.4040  
+31.33.453.4050 FAX

### Extron USA - West

Headquarters  
  
+800.633.9876  
Inside USA / Canada Only  
  
+1.714.491.1500  
+1.714.491.1517 FAX

### Extron USA - East

+800.633.9876  
Inside USA / Canada Only  
  
+1.919.863.1794  
+1.919.863.1797 FAX

### Extron Middle East

+971.4.2991800  
+971.4.2991880 FAX

### Extron Asia

+800.7339.8766  
Inside Asia Only  
  
+65.6383.4400  
+65.6383.4664 FAX

### Extron Japan

+81.3.3511.7655  
+81.3.3511.7656 FAX

### Extron China

+400.883.1568  
Inside China Only  
  
+86.21.3760.1568  
+86.21.3760.1566 FAX